


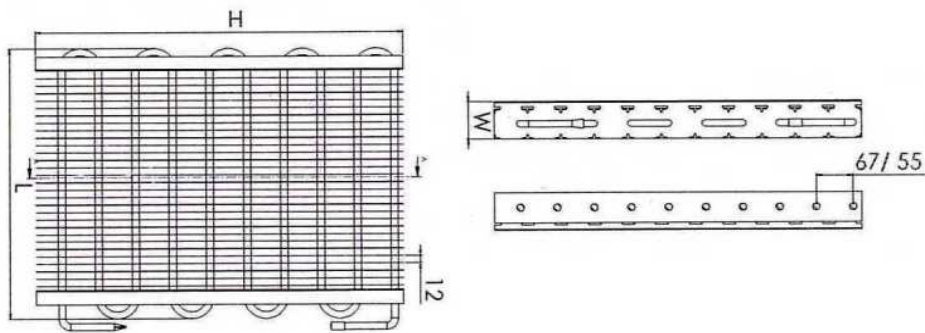

Kupferrohr: 1/2'', Lamellenabstand: 12mm							
Model	Maße/mm			Stränge	Kapazität		Fläche/m²
	L	H	W		Watt	kCal/h	

25RVY361	250	335	65	6	80	71	1,0
30RVY361	300	335	65	6	100	85	1,2
35RVY361	350	335	65	6	120	99	1,4
40RVY361	400	335	65	6	130	114	1,6
45RVY361	450	335	65	6	140	125	1,8
50RVY361	500	335	65	6	160	140	2,0

25RVY481	250	405	65	8	110	95	1,3
30RVY481	300	405	65	8	130	114	1,6
35RVY481	350	405	65	8	150	132	1,9
40RVY481	400	405	65	8	180	151	2,1
45RVY481	450	405	65	8	200	170	2,4
50RVY481	500	405	65	8	220	189	2,7

25RVY5101	250	560	65	10	140	118	1,7
30RVY5101	300	560	65	10	170	142	2,0
35RVY5101	350	560	65	10	190	166	2,3
40RVY5101	400	560	65	10	220	189	2,7
45RVY5101	450	560	65	10	250	213	3,0
50RVY5101	500	560	65	10	280	237	3,3

25RVY6121	250	675	65	12	170	142	2,0
30RVY6121	300	675	65	12	200	170	2,4
35RVY6121	350	675	65	12	230	199	2,8
40RVY6121	400	675	65	12	260	227	3,2
45RVY6121	450	675	65	12	300	256	3,6
50RVY6121	500	675	65	12	330	284	4,0

25RVY6121	250	780	65	14	190	166	2,3
30RVY6121	300	780	65	14	230	199	2,8
35RVY6121	350	780	65	14	270	323	3,3
40RVY6121	400	780	65	14	310	265	3,7
45RVY6121	450	780	65	14	350	298	4,2
50RVY6121	500	780	65	14	390	331	4,7