

**COMPRESSOR**

Displacement (cm <sup>3</sup> )	16.03
Diameter (mm)	32.6
Stroke (mm)	19.2
Net Weight (Kg)	16.8
Oil type	ISO VG 46 ESTER
Oil charge (cm <sup>3</sup> )	650

**MOTOR**

Approximate Power (CV)	3/4
Voltage/Frequency (V/Hz)	220V 50Hz
Voltage range (V)	187-264
Code	82,202
Type	CSR
Phase number	1 PH
Locked rotor current (A)	27.0
Main W. resist. at 25°C (Ω)	2.46
Start W. resist. at 25°C (Ω)	8.12

**APPLICATION**

Application	High/Mid. back pressure
Refrigerant	R404A
Evaporating (°C)	-25 to 10
Expansion	Capillar/Valve
Comp. cooling	Fan cooled
Max. ambient temp. (°C)	43

**NOMINAL PERFORMANCE**

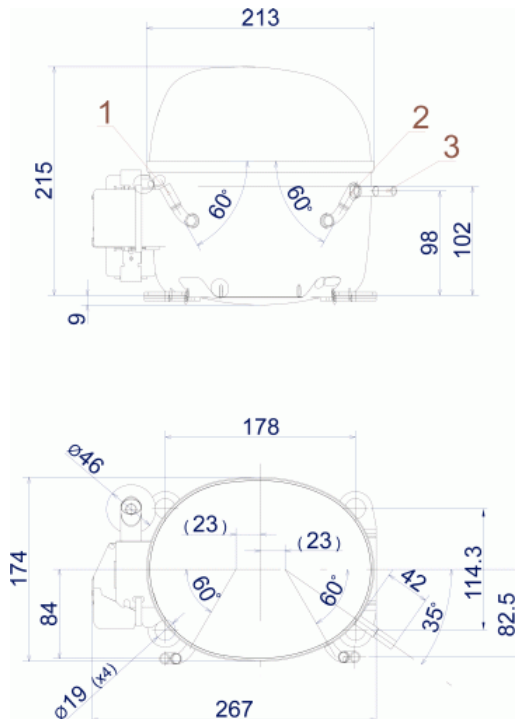
	<b>CYCLE C</b>	<b>CYCLE D</b>
Cooling capacity (W)	1880	2361
Input power (W)	1066	1100
EER (kcal/Wh)	1.51	1.84
COP (W/W)	1.76	2.14
Current (A)	5.24	5.40

**TEST CONDITIONS**

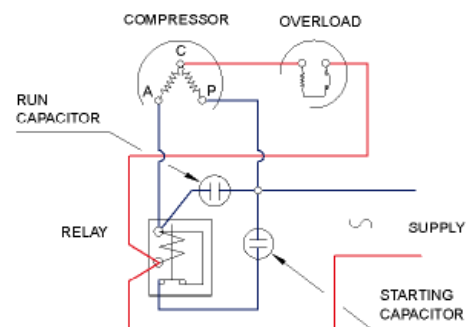
Evaporating temp. (°C)	5.0	7.2
Condensing temp. (°C)	55.0	55.0
Liq.t. entering expans. (°C)	55.0	46.0
Ambient t. and return (°C)	32.0	35.0
Tens/Freq (V/Hz)	220V 50Hz	220V 50Hz

**ELECTRICAL COMPONENTS**

Relay	3ARR3 10AS3	RVA 3G..
Pick-Up (A)	180-195	180-195
Drop-Out (A)	40-105	40-105
Protector	MRA38132	T0253/G.
Current (A)	16.2	15.0
Time check (seg)	7.5-14	7.5-14
Disc temp. (Open/Close) (°C)	105.0 / 52.0	105.0 / 52.0
Starting capacitor (μF/V)F/V)	64- 77 / 330	
Run capacitor (μF/V)	16 / 400	

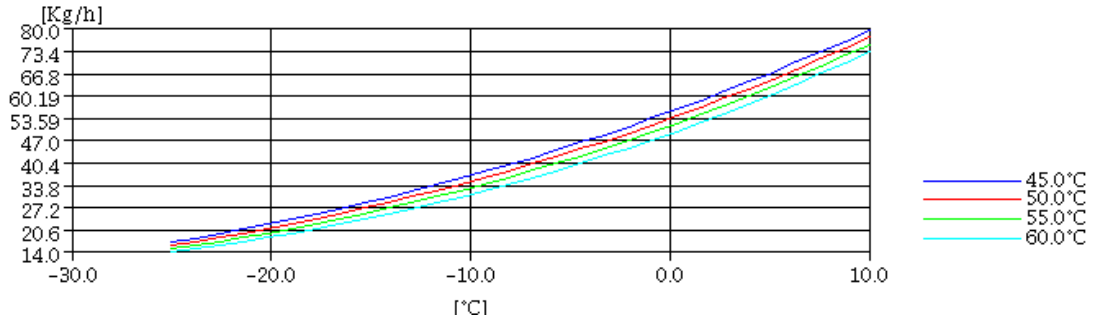
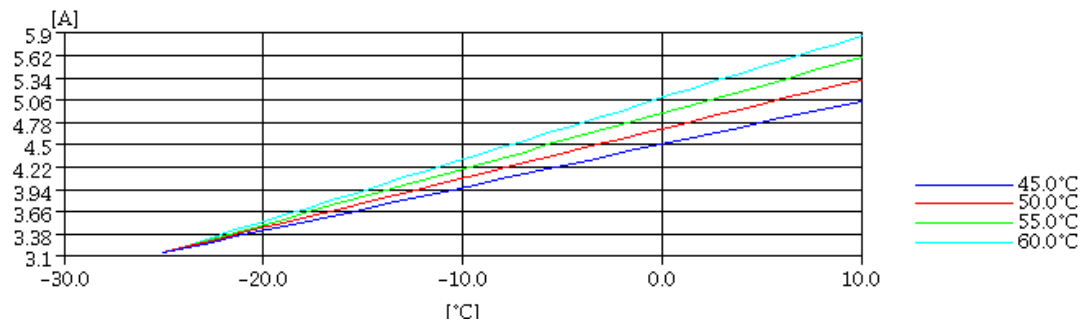
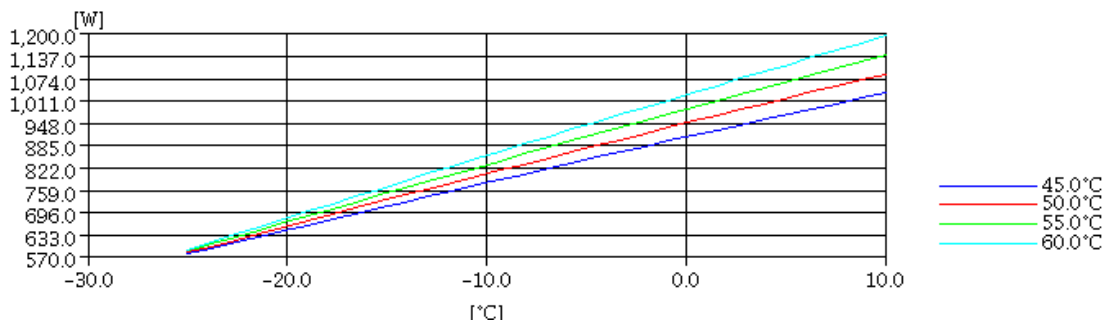
**DIMENSIONS AND ELECTRICAL DIAGRAM**


	<b>DESIGNATION</b>	<b>INTERNAL DIAM. (MM)</b>
1	Service	9.7
2	Suction	9.7
3	Discharge	6.5

**CSR**


**TEST CONDITIONS**

Voltage/frequency	220V 50Hz
Ambient t. and return	35 °C
Liq.t. entering expan.	Subcooling 9 K

**MASS FLOW**

**CONSUMPTION**

**INPUT W**

**COOLING CAPACITY**
