



ZİNGFA R404A HERMETİK KOMPRESÖRLER TEKNİK BİLGİLERİ


Models	Displacement (cm3)			REFRIGERATION CAPACITY AT 50 Hz rated 50HZ / 54.5 °C / Watt Evaporating Temperature						
		Weight (KG)	Oil Charge (cm3)	Power source	-25 ° C	-15 ° C	-10 ° C	0 ° C	+7.2 ° C	+15 ° C
QR 44	44	33	1500	220-240V/1 /50HZ	1.379	1.850	2.580	4.370	5.977	8.110
QR 58	58.2	34			1.638	2.390	3.310	5.720	7.967	10.240
QR 62	62.7	34			1.998	2.970	3.960	6.420	8.613	11.540
QR3-44	44	31	1500	380V/3/50HZ	1.379	1.850	2.580	4.370	5.977	8.110
QR3-58	58.2	33			1.635	2.390	3.310	5.720	7.967	10.240
QR3-62	62.7	33			1.998	2.970	3.960	6.420	8.613	11.540
QR3-74	74.2	33			3.078	2.805	4.296	7.276	9.814	13.056
QR3-90	90.2	46	2000		1.510	3.388	4.425	7.956	11.300	15.719
QR3-112	112.5	46			3.965	4.360	5.890	10.450	14.780	20.230
QR3-124	124.4	48			5.146	5.320	7.080	11.970	16.650	22.760
QR3-134	134.8	48			5.453	5.780	7.710	13.120	18.230	24.806

Condensing Temp Range <65 °C

Compressor Internal Protectors: Internal Motor Protector and Pressure Relief Valve

To obtain refrigeration capacity at 60Hz, multiply its values at 50Hz by 1.2

*Condensing Temp: 45 °C

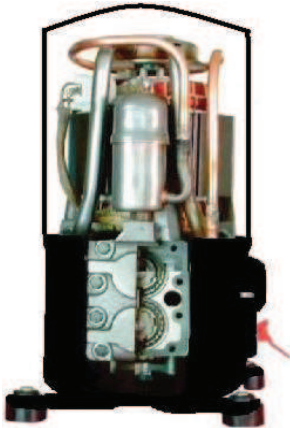

MODEL : QR3-90
MODEL : QR3-100
MODEL : QR3-112
MODEL : QR3-124
MODEL : QR3-134

